

ALUMINUM JOINERY



type hinged doors
application internal, external
fire rating -
material AL 6060 / 6063, anti-corrosion precoat, powder painted
infill glass, solid panel
options window, panic fittings, el. drive, etc




B15

A0


A30

type hinged doors
application internal, external
fire rating B15, A0, A30
material AL 6060 / 6063, anti-corrosion precoat, powder painted
infill glass, solid panel
options window, panic fittings, el. drive, etc

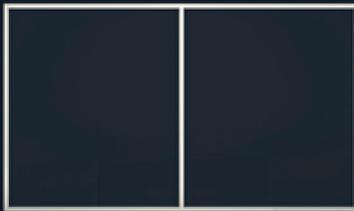

B15

type fixed window
application internal, external
fire rating non-rated, B15
material AL 6060 / 6063, anti-corrosion precoat, powder painted
infill glass
options functional glass



type manual sliding doors
application internal, external
fire rating -
material AL 6060 / 6063, anti-corrosion precoat, powder painted
infill glass, solid panel
options low sill, el. drive, child lock




A0

type automatic sliding doors
application internal, external
fire rating non-rated, A0
material AL 6060 / 6063, anti-corrosion precoat, powder painted
infill glass, solid panel
options heated sill, remote network control, radar, barrier, overload safety switch

GLASS

Shape	Safety functions	Functionality	Colour
flat	ESG	heated	transparent
bent	laminated	isolated	tinted
		soundproof	silk print
		fire-rated	
		bulletproof	
		Priva-Control	
		EMI	
		explosionproof	
		shatterproof	

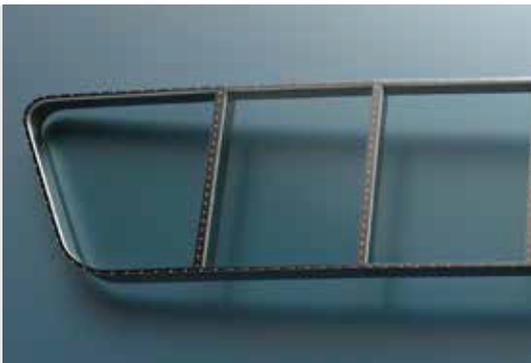

type heated glass
power acc. to ISO3434 up to 21W/dm²
voltage 24VDC, 230VAC, 440VAC



type laminated safety glass
foils PVB, SGP, EVA



type bulletproof Armex® glass
classes BR4S(NS) - BR7S(NS) acc. to EN1063
 Level1 acc. to Stanag 4569/AEP-55
 Level2 acc. to Stanag 4569/AEP-55 -
 certificate pending